



# C4K HDMI VIDEO CAPTURE

**4K** 60Hz



4K HDMI  
IN& OUT



VRR Variable  
Refresh Rate



High  
Refresh Rate



Plug and  
Play



Low  
Latency




CNC  
Aluminium

## >> FEATURES

- High quality CNC aluminium housing
- Pocket size, tiny and portable
- HDMI input and output support up to 4K60Hz
- MJPEG format supports up to 4K60Hz
- NV12, I420 format support up to 4K30Hz
- Supports 240Hz per second high refresh rate
- Support Variable refresh rate(VRR), real time adaptation the signal source and device frame rate
- USB3.0 plug and play, driver free
- Compatible with Windows, MacOS, Linux system
- Compatible OBS Studio, Potplayer and more software
- Dual mic audio inputs and a 3.5mm headphone jack

## >> CONNECT ANY SETUP

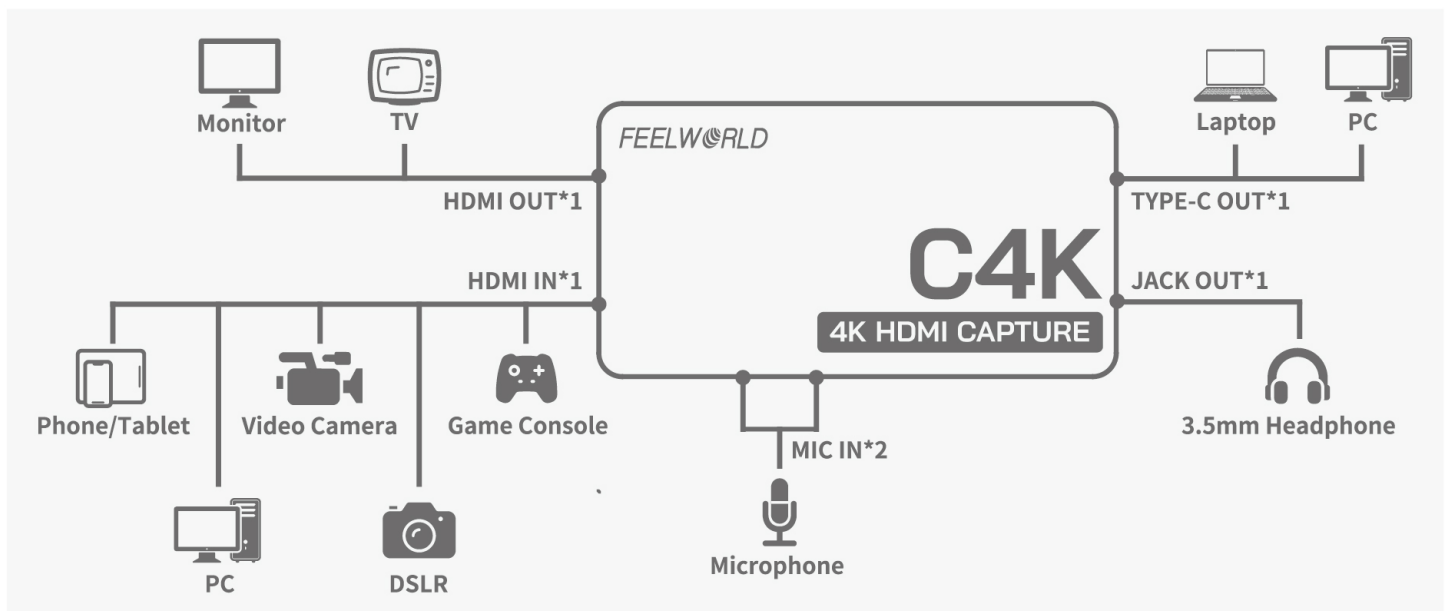

## >> PARAMETER

Description	4K HDMI VIDEO CAPTURE
Model	C4K
Material	CNC Aluminium
Input	HDMI 2.0
Output	HDMI 2.0, Type-C
Audio	2*MIC, 1*3.5mm headphone jack
HDMI	480i/576i/480p/576p
Input and	720p (60/59.94/50/30/29.97/25/24/23.98)
Output	1080i (60/59.94/50)
Support	1080p (60/59.94/50/30/29.97/25/24/23.98)
Format	3840×2160p (60/50/30/29.97/25/24/23.98) 4096×2160p (60/50/30/29.97/25/24/23.98)
Video Format	MJPEG,YUY2,NV12,I420,RGB24,P010
Compatible System	Windows 7/8/10/11, Linux, MacOS
Compatible Software	OBS Studio/Potplayer/XSplit/QuickTime Player,etc.
Voltage of Computer	5V at least
Unit Weight	52g
Unit Size	85x45x10mm

Capture Device requirement	Mac OS: 10.12 or above
	Windows: support UVC protocol
MJPG 4K60 computer configuration requirement	<b>PC</b>
	CPU: Intel Core i7-10xxx or above
	GPU: NVIDIA GeForce GTx 1650 or above
	RAM: 8G (dual channel)
NV12 I420 4K30 computer configuration requirement	<b>Laptop</b>
	CPU: Intel Core i5-6xXX or above
	GPU: NVIDIA GeForce GTx1060 or above
	RAM: 8G (dual channel)
PC	CPU: Intel Core i7-7700HQ or above
	GPU: NVIDIA GeForce GTx 1050Ti or above
	RAM: 8G (dual channel)
	<b>Laptop</b>
Laptop	CPU: Intel Core i9-9xXX or above
	GPU: NVIDIA GeForce GTx 1650 or above
	RAM: 8G (dual channel)

## >> RESOLUTION/FRATE RATES SUPPORTING

YUY2	1920x1080 60
	1920x1080P 60 (P16:9)
	640x480 60
	640x480P 60 (P4:3)
	720x576 50
	720x576P 50(P5:4)
	1280x720 120
	1280x720P 120(P16:9)
	2560x1080 50
	2560x1080P 50(P 64:27)
	2560x1440 50
	2560x1440P 50(P 16:9)
	MJPEG
3840x2160P 60 (P16:9)	
640x480 60	
640x480P 60 (P4:3)	
720x576 50	
720x576P 50(P5:4)	
1280x720 120	
1280x720P 120(P16:9)	
1920x1080 240	
1920x1080P 240(P 16:9)	
2560x1440 144	
2560x1440P 144 (P16:9)	
2560x1080 60	
2560x1080P 60(P 64:27)	


NV12	3840x2160 30
	3840x2160P 30 (P16:9)
	2560x1080 60
	640x480P 60(P 4:3)
	720x576 50
	720x576P 50(P 5:4)
	1280x720 120
	1280x720P 120(P 16:9)
	1920x1080 120
	1920x1080P 120(P 16:9)
	2560x1080 60
	2560x1080P 60(P 64:27)
I420	2560x1440 60
	2560x1440P 60(P16:9)
	3840x2160 30
	3840x2160P 30 (P16:9)
	640x480 60
	640x480P 60(P 4:3)
	720x576 50
	720x576P 50(P5:4)
	1280x720 120
	1280x720P 120(P 16:9)
	1920x1080 120
	1920x1080P 120(P 16:9)
	2560x1080 60
	2560x1080P 60(P 64:27)
2560x1440 60	
2560x1440P 60 (P16:9)	

RGB24	1920x1080 60
	1920x1080P 60 (P16:9)
	640x480 60
	640x480P 60 (P4:3)
	720x576 50
	720x576P 50(P5:4)
	1280x720 120
	1280x720P 120(P 16:9)
	2560x1080 30
	2560x1080P 30(P 64:27)
P010	2560x1440 30
	2560x1440P 30 (P16:9)
	1920x1080 60
	1920x1080P 60(P 16:9)
	640x480 60
	640x480P 60 (P4:3)
	720x576 50
	720x576P 50(P5:4)
1280x720 120	
1280x720P 120(P 16:9)	
2560x1080 30	
2560x1080P 30(P 64:27)	
2560x1440 30	
2560x1440P 30(P 16:9)	






## >> MULTIPLE APPLICATIONS

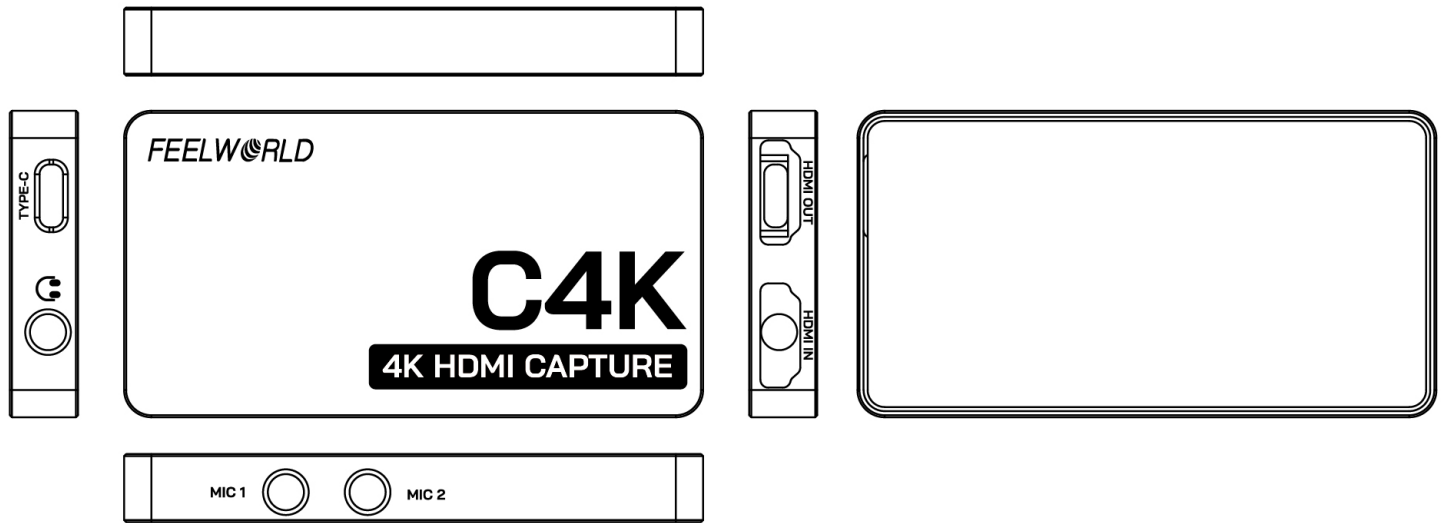

## >> STRUCTURE



## >> PACKING LIST

 <p>Video Capture</p>	 <p>HDMI Cable</p>	 <p>USB/Type-C Cable</p>	 <p>Cable Management Tie</p>	 <p>User Manual</p>
--	---	---	---	--

**HDMI® CE FC RoHS**

Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: [sales@feelworld.cn](mailto:sales@feelworld.cn)

Tel: +86-596-2182566

Website: [www.feelworld.com.cn](http://www.feelworld.com.cn)

Fax: +86-596-2672617

[www.seetec.com.cn](http://www.seetec.com.cn)